

# Fit Collection

## PREMIUM FIT | BASIC FIT

Rolls & Interlocking Tiles

### PRODUCT ATTRIBUTES

- **8mm Vulcanized Composition Rubber**

A durable surface that provides ergonomic benefits and is slip resistant wet or dry

The Fit Collection is the “original” recycled rubber fitness floor. Available in rolls and tiles, this durable surface sets the standard for performance, quality, and affordability.



### APPLICATIONS

- Free Weights
- Therapy/Rehab
- Retail
- Public Spaces
- Selectorized Strength
- Childcare/Playzones
- K-12/Higher Education
- Cardio

### BENEFITS

- Durable
- Ergonomic
- Slip-resistant
- Easy to maintain
- Interlocking tiles are quick and easy to install

### NOMINAL DIMENSIONS

Available as a standard in rolls and interlocking tiles. Talk to your local sales rep to determine availability, pricing, minimums, and lead times.



8mm x 48" (1.2m)  
6mm x 48" (1.2m)\*  
9mm x 48" (1.2m)\*

\*Available in EL00, EL01, and EL02, EL05 only



8mm x 23" (.58m) x 23" (.58m)


NRG =



**Force Reduction: 10.4%**  
Absorption of impact energy




**Energy Restitution: 71.9%**  
Useful return of impact energy

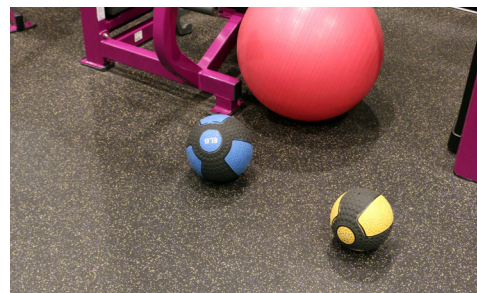


# Fit Collection


## BASIC FIT




Buff Blue / Gray 10 EL04




Rippin Red / Gray 10 EL06




Grippin Gray 10 EL02




Buff Blue 10 EL01




Rippin Red 10 EL05



Yellow Surge EL07



Pumpkin Purple EL09



Green Tea 3 EL32B

## PREMIUM FIT




Steel Appeal 2 EL15A




Dark Gray EL502




Mocha Latte 2 EL43A



Raiders EL503




Blue Jays EL103




Cardinals EL104




Wildcats 3 EL100B




Gators 3 EL107B




Tigers EL106




Lions EL102




Vikings EL101




Grippin Gray 20 EL46



Buff Blue 20 EL45



Whey Protein 2 EL97A



Rippin Red 20 EL47



Jet Black EL00

## TECHNICAL DETAILS

Performance Criteria	Test Standard	Typical Results
Recovery after Static Load (@1,000 psi)	ASTM F970 Modified	0.020"
Coefficient of Friction	ASTM D2047	>0.8
FloorScore	CA 01350	Certified
Abrasion Resistance	ASTM D3389	Pass
Flammability - Pill Test	ASTM D2859	Pass
Impact Insulation Class (IIC)*	ASTM E492	51
Delta IIC*	ASTM E2179	22

\*Tested on a 6" concrete slab with no ceiling.