

Product Sales Sheet

# Performance Monster

Custom-made for extreme strength and conditioning, this 22.5mm system features a 10.5mm Performance Beast Roll field united to a 12mm ShockPad. The resulting triple durometer system combines the durability and firm footing desired in strength training with the ergonomic demands of aggressive functional training in one surface.



## Markets

- Fitness
- Sports
- Student Rec

## Applications

- Cardio
- Light Weights
- Moderate Weights
- Extreme Weights
- Extreme Functional Training
- Tracks
- Strength Equipment
- Functional Training

## Benefits

- Durable
- Sustainable
- Ease of maintenance
- Slip-resistant



TRAIN LIKE A TROJAN



## Product Options

**Size:**

Available as a standard in rolls. All custom options should be discussed with your local agent to determine availability, pricing, minimums, and lead times.

**Color Options:**

- See website for colors.



22.5mm (2.5mm+8mm/12mm)  
x 48" (1.2m)





## Technical Details

| Performance Criteria           | Test Standard | Typical Results    |
|--------------------------------|---------------|--------------------|
| Static Load Limit              | ASTM F970     | 0.025" (@ 250 psi) |
| Coefficient of Friction        | ASTM D2047    | > 0.8              |
| FloorScore                     | CA 01350      | Certified          |
| Abrasion Resistance            | ASTM D3389    | < 1g, 1,000 cycles |
| Pill Test                      | ASTM D2859    | Pass               |
| Standard Vertical Deformation  | ASTM F2772    | 1.6mm              |
| Surface Effect Slip Resistance | ASTM F2772    | 92                 |
| Ball Rebound                   | ASTM F2772    | 100%               |
| Force Reduction                | ASTM F2772    | 40%                |
| Impact Insulation Class*       | ASM E492      | 58                 |
| Delta IIC*                     | ASTM E2179    | 29                 |

\*Tested on a 6" concrete slab with no ceiling.



53.5%


**Force Reduction**  
Absorption of impact energy



38.1%

**Energy Restitution**  
Useful return of impact energy

Values based on Delttec Test

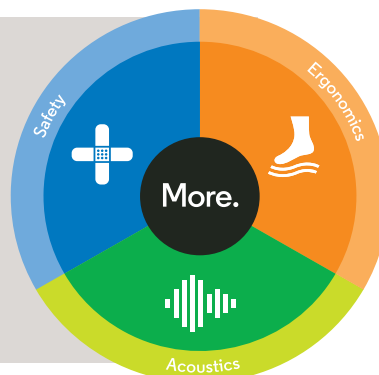

Can a floor  
do more?  
**Yes.**