

Product Sales Sheet

# Everlast SmashTile

This 2-foot by 2-foot by 2.5-inch molded tile is designed for areas where extreme durability and ultimate impact absorption are required. SmashTile mitigates the shock and sound resulting from weights being released onto its surface by absorbing impact. SmashTile is the perfect compliment to platform style weight lifting.

Not designed for Olympic-style weightlifting



## Markets

- Fitness
- Sports
- Student Rec

## Applications

- Light Weights
- Moderate Weights
- Heavy Weights
- Strength Equipment

## Benefits

- Superior impact absorption
- Patented "Ultra" high-density wear layer
- Slip resistant
- Easy Quad Blok installation system



## Product Options

**Size:**

Available as a standard in tiles. All custom options should be discussed with your local agent to determine availability, pricing, minimums, and lead times.




2.5" (6.4 cm) x 24" (61cm) x 24" (61cm)

**Color Options:**

• Available in 17 color options.

**Quad Blok:**

• SmashTile uses Ecore's Quad Blok interlocking system

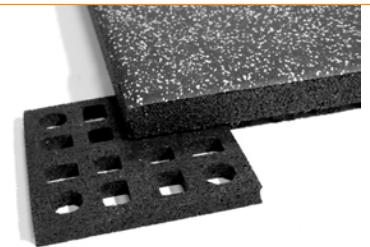





## Technical Details

Performance Criteria	Test Standard	Typical Results
Coefficient of Friction	ASTM D2047	> 0.9
FloorScore	CA 01350	Certified
Abrasion Resistance	ASTM D3389	<1g, 1000 cycles
Pill Test	ASTM D2859	Pass
Impact Insulation Class*	ASTM E492	59
Delta IIC*	ASTM E2179	29

\*Tested on a 6" concrete slab with no ceiling.




**Force Reduction**  
Absorption of impact energy



**Energy Restitution**  
Useful return of impact energy

Values based on Delttec Test

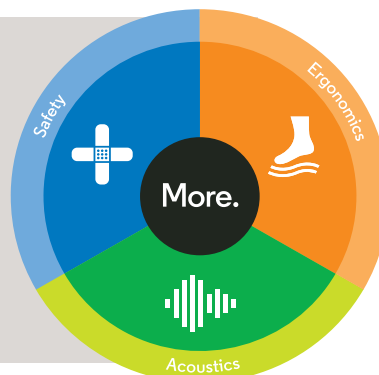

Can a floor  
do more?  
**Yes.**