

Product Sales Sheet

# Bounce 2

Bounce 2 features a synthetic wood-grain surface and is fusion bonded to a 5mm base layer with 2.5 inch board widths. This six-foot-wide floor offers a seamless, easy-to-maintain surface that is ideal for group fitness and functional training, while being durable enough for cardio equipment and light weights.



## Markets

- Fitness
- Sports
- Student Rec

## Applications

- Common Areas
- Offices

## Benefits

- Hygienic because of heat-welded installation
- Quiet underfoot
- Ergonomic
- Low maintenance
- Can paint lines on surface



## Product Options

**Size:**

Available as a standard in rolls.  
Talk to your local agent to determine availability, pricing, minimums, and lead times.

**Color Options:**

• See website for colors.



7mm (2mm + 5mm) x 72" (1.83m) x  
30LF (9.14m)  
Weld rod required



## Technical Details

Performance Criteria	Test Standard	Typical Results
Static Load Limit	ASTM F970	Pass
Coefficient of Friction	ASTM D2047	> 0.6
FloorScore	CA 01350	Certified
Reaction to Fire	ASTM E648	Class 1
Abrasion Resistance	EN649	Group T/Type 1
Dynamic Rolling Load	ASTM F2753	No change, No Damage (@10,000 cycles)
Standard Vertical Deformation	ASTM F2772	0.72mm (Class B)
Surface Effect Slip Resistance	ASTM F2772	100 BPV (Pass)
Ball Rebound	ASTM F2772	95.5%
Force Reduction	ASTM F2772	12.5%



11.9%


**Force Reduction**  
Absorption of impact energy



68.4%

**Energy Restitution**  
Useful return of impact energy

Values based on Deltec Test

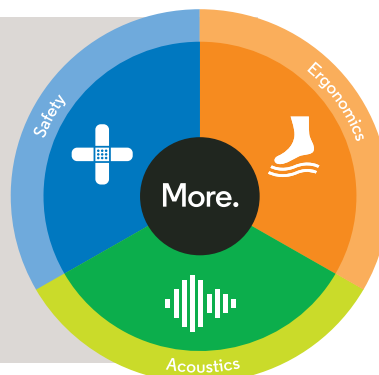

Can a floor  
do more?  
Yes.