

Product Sales Sheet


Ultra-Turf Tile & dB-Turf Tile

Ultra-Turf Tile and dB-Turf Tile feature a dense, textured nylon wear layer fusion molded to a vulcanized composition layer. While too abrasive to fall or dive on, this consistent and tight surface is ideal for speed & functional training. Ultra-Turf Tile is an ideal match to UltraTile, while dB-Turf Tile (decibel) is an ideal acoustic match to SmashTile.

Ultra-Turf Tile



dB-Turf Tile

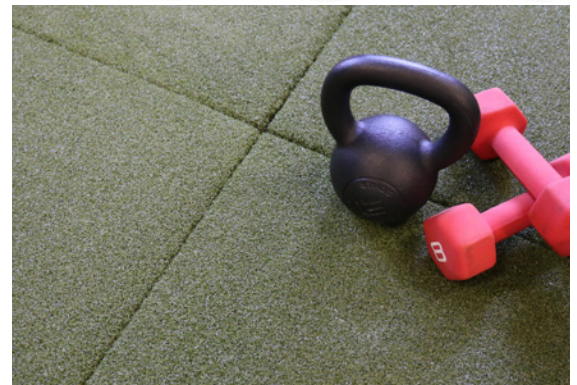

Markets

- Fitness
- Sports
- Student Rec

Applications

- Light Weights
- Moderate Weights
- Functional Training
- Extreme Functional Training

Benefits

- Durable
- Sustainable
- Ease of Maintenance
- Slip-Resistant
- Easy installation with QuadBlok installation system

Product Options:

Ultra-Turf Tile Size:

Available as a standard in tiles.



Tile:
1" x 24" (61cm) x 24" (61cm)



Reducers:
4" (102mm) x 48" (1.22m)
Thickness: 1" (25.4mm)



ADA Ramp:
12" (305mm) x 48" (1.22m)
Thickness: 1" (25.4mm)



Quad Blok:
1/2" H x 4 3/4" x 4 3/4"
Adhesive = 1 Tube / 15 Quad Bloks

dB-Turf Tile (decibel) Size:

Available as a standard in tiles.



Tile:
2.5" x 24" (61cm) x 24" (61cm)



Reducers:
8" (203mm) x 48" (1.22m)
Thickness: 2.5" (63.5mm)



ADA Ramp:
64" (1625mm) x 30" (762mm)
Thickness: 2.5" (63.5mm)



Quad Blok:
17" H x 8" x 8"
Adhesive = 1 Tube / 10 Quad Bloks

Technical Details

Performance Criteria	Test Standard	Typical Results
Lead Content	ASTM D2765	< 50 ppm
Total Yarn Linear Density	ASTM D1577	4,200 Denier
Yarn Breaking Strength	ASTM D2256	> 19 lbs
Yarn Melting Point	ASTM D7138	428°F
Flammability	ASTM D2859	Pass
Coefficient of Friction	ASTM C1028	0.78 Dry



68.2%

49.6%

Force Reduction
Absorption of impact energy



44.7%


45.2%

Energy Restitution
Useful return of impact energy

dB-Turf Tile

Ultra-Turf Tile

Values based on Deltac Test, 5mm.



Can a floor
do more?
Yes.