

Product Sales Sheet

Performance Monster

Custom-made for extreme strength and conditioning, this 22.5mm system features a 10.5mm Performance Beast Roll field united to a 12mm ShockPad. The resulting triple durometer system combines the durability and firm footing desired in strength training with the ergonomic demands of aggressive functional training in one surface.



Markets

- Fitness
- Sports
- Student Rec

Applications

- Cardio
- Light Weights
- Moderate Weights
- Extreme Weights
- Extreme Functional Training
- Tracks
- Strength Equipment
- Functional Training

Benefits

- Durable
- Sustainable
- Ease of maintenance
- Slip-resistant

TRAIN LIKE A TROJAN



Product Options

Size:

Available as a standard in rolls. All custom options should be discussed with your local agent to determine availability, pricing, minimums, and lead times.

Color Options:

- See website for colors.



22.5mm (2.5mm+8mm/12mm)
x 48" (1.2m)



Technical Details

Performance Criteria	Test Standard	Typical Results
Static Load Limit	ASTM F970	0.025" (@ 250 psi)
Coefficient of Friction	ASTM D2047	> 0.8
VOC Compliant	ASTM D5116	Yes
FloorScore	CA 01350	Certified
Abrasion Resistance	ASTM D3389	< 1g, 1,000 cycles
Pill Test	ASTM D2859	Pass
Standard Vertical Deformation	ASTM F2772	1.6mm
Surface Effect Slip Resistance	ASTM F2772	92
Ball Rebound	ASTM F2772	100%
Force Reduction	ASTM F2772	40%
Impact Insulation Class*	ASM E492	58
Delta IIC*	ASTM E2179	29

*Tested on a 6" concrete slab with no ceiling.



53.5%


Force Reduction
Absorption of impact energy



38.1%

Energy Restitution
Useful return of impact energy

Values based on Delttec Test

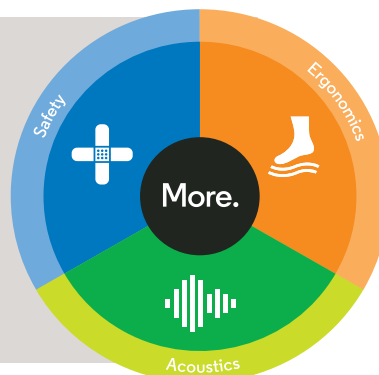

Can a floor
do more?
Yes.